


MARQUIS II VL55I H/F

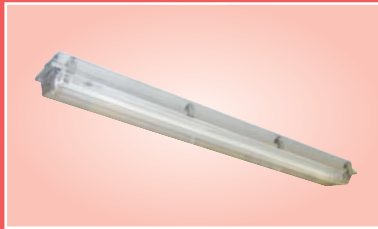

VL55I with stainless steel body

FEATURES AND BENEFITS


Lightweight and slimline construction • Simple to install and maintain • High frequency electronic control gear • Single and twin lamp versions

CERTIFICATION & APPROVALS

Ingress protection IP65
to EN60529

Designed & manufactured
to EN60598-1

DIMENSIONS

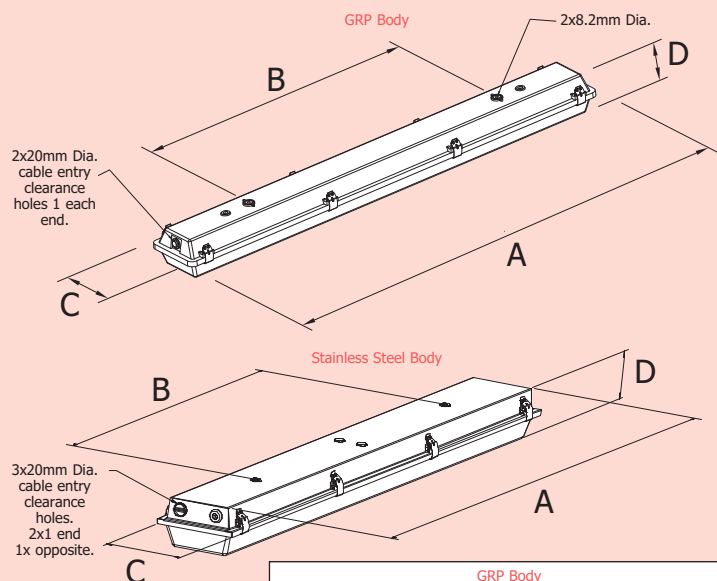

	GRP Body		
	1 x 18W / 2x18W	1x36W / 2x36W	1x58W / 2x58W
A	702	1312	1612
B	500	800	1100
C	102 / 172	102 / 172	102 / 172
D	106	106	106
	Stainless Steel Body		
	1x18W / 2x18W	1x36W / 2x36W	1x58W / 2x58W
A	700	1312	1612
B	500	800	1100
C	172	172	172
D	106	106	106

Dimensions in millimetres

TECHNICAL SPECIFICATION

LAMP TYPES

T8, Ø26mm, G13 cap bi-pin fluorescent.
Available in the following configurations: 2 x 18W, 2 x 36W, 2 x 58W.

POWER SUPPLY

120V-254V, 50/60Hz AC
175V-270V DC

POWER FACTOR

Greater than 0.95

TERMINALS

4 core up to 4 mm² conductors. Through wiring is available as an option. Terminals for live constant, live switched, neutral & earth are provided. Internally earthed.

CABLE ENTRIES

Pre-drilled Ø20mm.

Supplied with 1 x transit plug and the required number of blanking plugs.

Cable entry devices (ie. glands) must maintain the IP rating for the luminaire.

MATERIALS

Body Corrosion resistant glass reinforced polyester (GRP) or stainless steel.
Diffusers Polycarbonate.
Clips Stainless Steel (18Wx6, 36Wx8 & 58Wx10).
Gear Tray White polyester painted zinc coated steel.

CONTROL GEAR

High frequency electronic ballast.

WEIGHT

GRP Body	Stainless Body
1 x 18W Lamp - 2.3Kg	1 x 18W Lamp - 5.3Kg
1 x 36W Lamp - 3.3Kg	1 x 36W Lamp - 6.3Kg
1 x 58W Lamp - 3.7Kg	1 x 58W Lamp - 6.7Kg
2 x 18W Lamps - 2.6Kg	2 x 18W Lamps - 5.6Kg
2 x 36W Lamps - 3.6Kg	2 x 36W Lamps - 6.6Kg
2 x 58W Lamps - 4.1Kg	2 x 58W Lamps - 7.1Kg

SUSPENSION

8mm clearance holes, sealing washers are provided.

A range of mounting accessories are available. See below:

ORDERING REFERENCE

Std. Cat Ref.	Wattage	Lamp Type
MA2I/118/BI/HF	1X18W	Bi-Pin
MA2I/218/BI/HF	2x18W	Bi-Pin
MA2I/136/BI/HF	1x36W	Bi-Pin
MA2I/236/BI/HF	2x36W	Bi-Pin
MA2I/158/BI/HF	1x58W	Bi-Pin
MA2I/258/BI/HF	2x58W	Bi-Pin

**A stainless steel body version is also available.
To order substitute MA2I with MS2I.**

OPTIONS - SUFFIX TO CATALOGUE REF.

/MF	Mains fuse
/T	Through wired
/EA	External earth (earth tag - GRP body only) (earth stud - stainless body only)

ACCESSORIES

Pole mount bracket (38-42mm)
SPOL4-100004

Pole mount bracket (48-52mm)
SPOL4-100005

Pole mount bracket (58-62mm)
SPOL4-100006

Offset ceiling bracket assembly
S3004-100001

C' form hook type ceiling bracket assembly
S3004-100003

Flush mounted wall bracket assembly
S3004-100004

**18W wall mounting outreach bracket
(use with S3004-100002)**
NPRO4-0008

**36W wall mounting outreach bracket
(use with S3004-100002)**
NPRO4-0012

**58W wall mounting outreach bracket
(use with S3004-100002)**
NPRO4-0022