




4 OFF-6.5mm Dia Mounting Holes

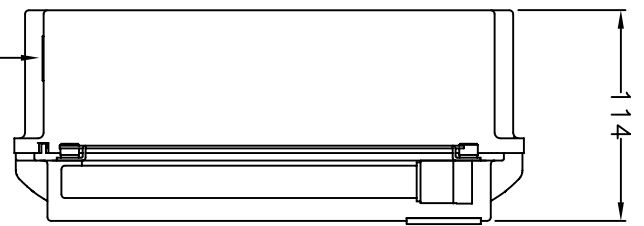

VIEW 'A'

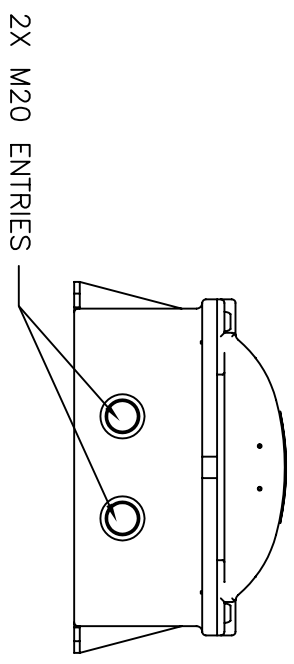

VIEW 'A'

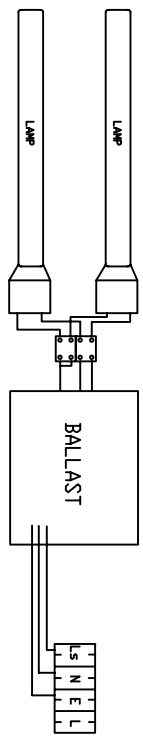

TYPICAL WIRING DIAGRAM

CERTIFICATION: PATHFINDER VL114S
 CERTIFICATE No: SIRA03ATEX3556
 CODING: Ex II 2 GD EEx em II

- NOTES:**
- a) BODY MATERIAL : POLYCARBONATE
 - b) DIFFUSER : CLEAR POLYCARBONATE
 - c) REFLECTOR: PAINTED MARINE GRADE STAINLESS STEEL REFLECTOR
 - d) EXTERNAL FIXINGS : STAINLESS STEEL
 - e) CONTROL GEAR : HIGH FREQUENCY
 - f) TERMINATION: UP TO 6MM SQ x 4 CORE
 - g) ENTRIES: 2 X M20
 - h) SUPPLY VOLTAGE: 220-277V 47-63Hz AC/DC
 - i) LAMP TYPE : 2X18W COMPACT FLUORESCENT (ALSO AVAILABALE AS 1X11W)
 - j) LUMINAIRE IP RATING : IP 66/67
 - k) WEIGHT: 1.8KG

CATALOGUE REF FOR 1X11W : PATE/111/CF

DRAWN	Slee
CHECKED	
APPROVED	
DATE	30-01-2006

WITHOUT OUR PERMISSION THIS DRAWING, WHICH IS OUR COPYRIGHT, MAY NOT BE REPRODUCED OR MADE AVAILABLE TO THIRD PARTIES. AUTHORISATION IS GIVEN TO TO REPRODUCE THIS DRAWING FOR INTERNAL PURPOSES ONLY.		DIM5. IN		MM		SCALE -		NTS		DRAWING NUMBER/SHEET NUMBER F2352 1 OF 1	
DOC No	MOD BY	MATERIAL	CHANGE	TOLERANCE	ISSUE	DATE	Victor Lighting Victor Lighting Road, 368 Hillington Road, Glasgow G52 4BL, Scotland Tel:0141 810 9644 Fax:0141 810 9642				
SEE NOTES		FINISH		SURFACE ROUGHNESS		PATE/218/CF PATHFINDER VL114S 2X18W VERSION					