DRAWING NUMBER/SHEET NUMBER
F2498

REMOVE ALL BURRS & SHARP EDGES IF IN DOUBT ASK! 3RD ANGLE PROJECTION

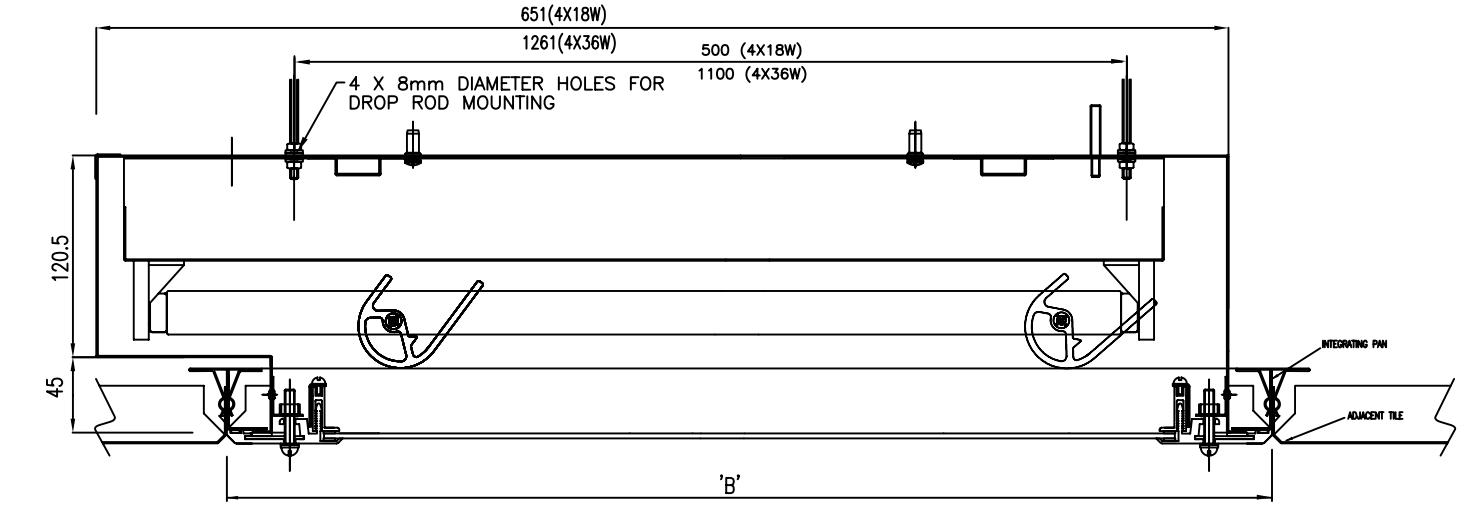

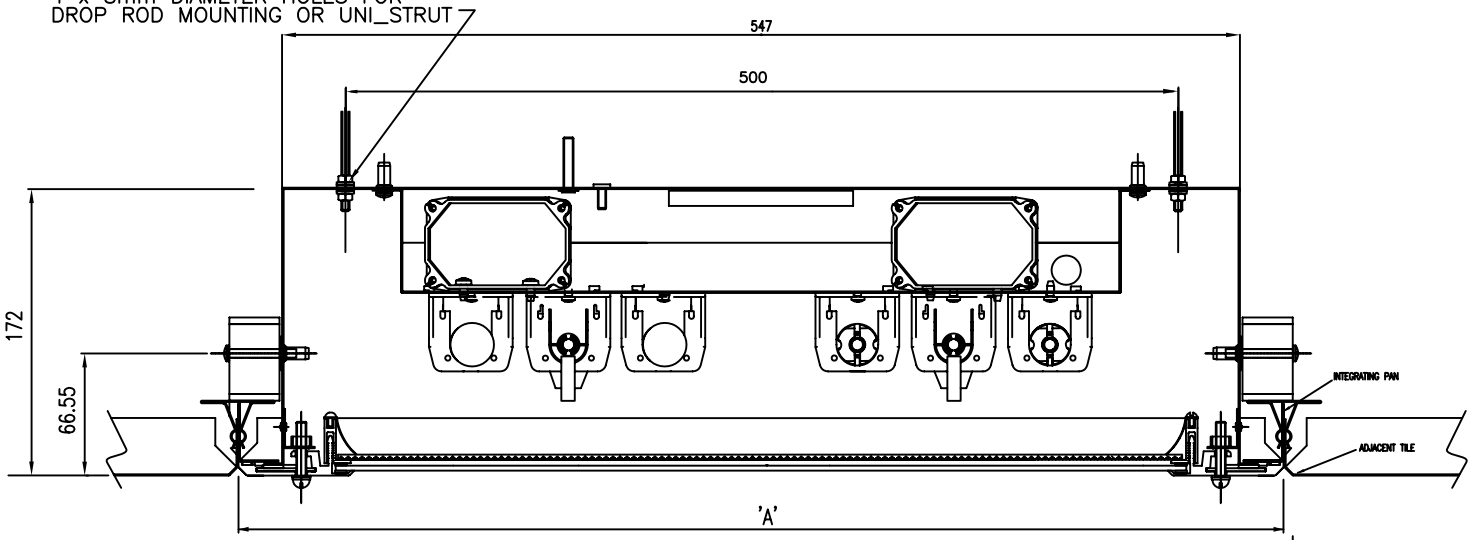

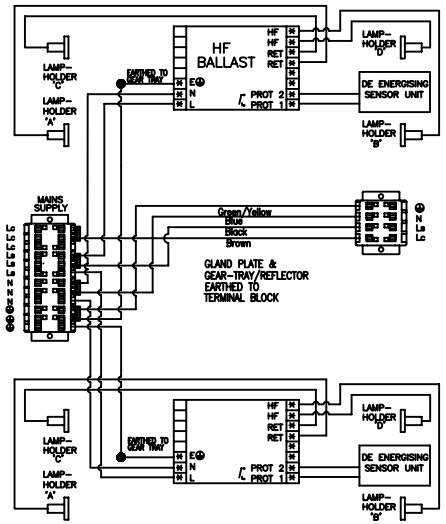

TYPICAL WIRING DIAGRAM

NOTES:

CERTIFICATE No: Baseefa05ATEX0237X
CODING: Ex II 2GD EEx eqm II T4
−20C TO +40C
TERMINALS : UP TO 6MM SQ/3 CORES
CABLE ENTRIES : THREE X 20 mm ENTRIES ON TOP OF LUMINAIRE
CONTROL GEAR: ELECTRONIC CONTROL GEAR
INGRESS PROTECTION : IP65 TO EN60598−1:2000
ENCLOSURE : WHITW POLYESTER PAINTED ZINC COATED STEEL BODY & FRAME
DIFFUSER: PRISMATIC POLYCARBONATE
REFLECTOR: WHITE POLYESTER PAINTED ZINC COATED STEEL
GASKET: EPDM RUBBER

WEIGHT:
4X18W − 16KG
4X36W − 20KG

CATALOGUE REF	'A'	'B'	CIRCUIT WATTS	POWER SUPPLY
104E/418/BI	599	599	70	220−254V AC/DC 220−300V DC 50−60Hz
104E/436/BI	599	1199	140	

LUMINAIRE SATISFIES THE REQUIREMENTS OF FS 209D AND CLASS 100 CLEAN ROOMS

DCF No	MOD BY	CHANGE	ISSUE	DATE

DRAWN	SLee
CHECKED	
APPROVED	
DATE	13.09.06

REF. DRGS.−

WITHOUT OUR PERMISSION THIS DRAWING, WHICH IS OUR COPYRIGHT, MAY NOT BE REPRODUCED OR MADE AVAILABLE TO THIRD PARTIES.
AUTHORISATION IS GIVEN TO ..... TO REPRODUCE THIS DRAWING FOR INTERNAL PURPOSES ONLY.

MATERIAL: ZINC COATED STEEL	TOLERANCE
FINISH: WHITE POLYESTER PAINTED	SURFACE ROUGHNESS
DIMS. IN MM	SCALE −

Victor Lighting

Victor Lighting
PO Box 5571,
Glasgow G52 9AH
Scotland
Tel:0141 810 9644 Fax:0141 810 9642

TITLE
VL104C RECESSIBLE TYPE
4x18w & 4x36W VERSION
MST CEILING TYPE

DRAWING NUMBER/SHEET NUMBER
F2498 1 OF 1