1	2	3	4	5	6	7	8

DRAWING NUMBER/SHEET NUMBER
F2281

REMOVE ALL BURRS & SHARP EDGES IF IN DOUBT ASK! 3RD ANGLE PROJECTION

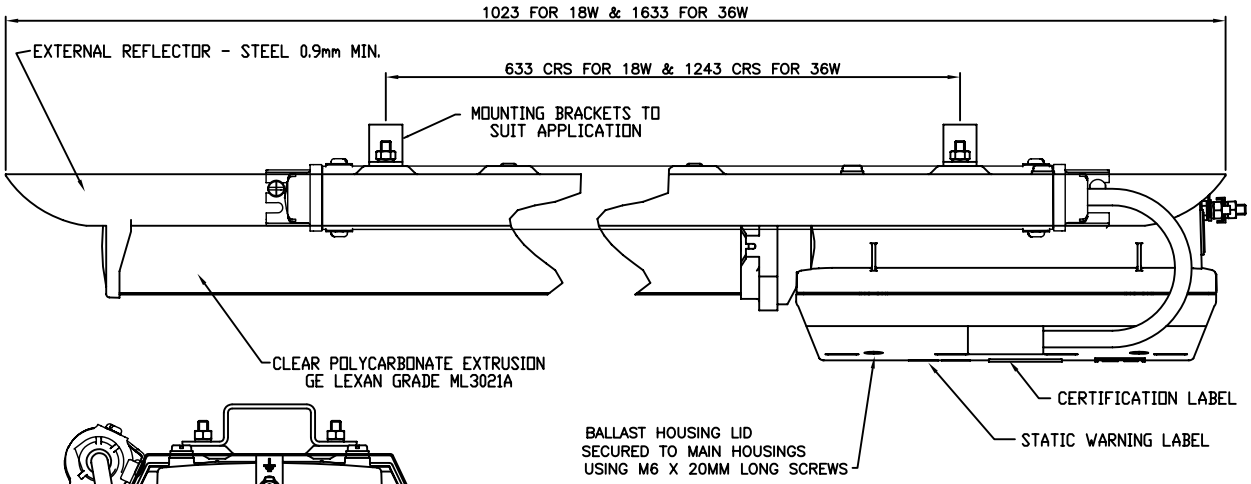

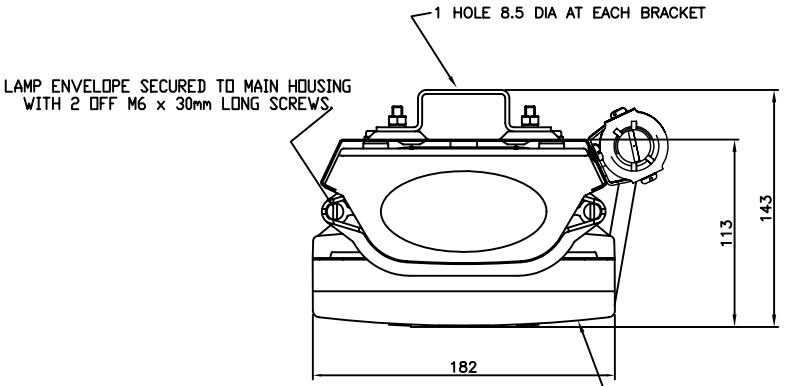

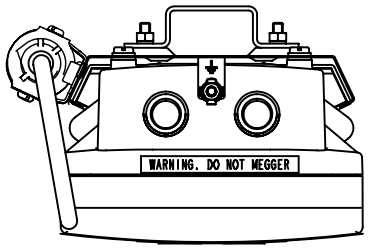

VIEW ON CABLE ENTRY SIDE OF BALLAST HOUSING

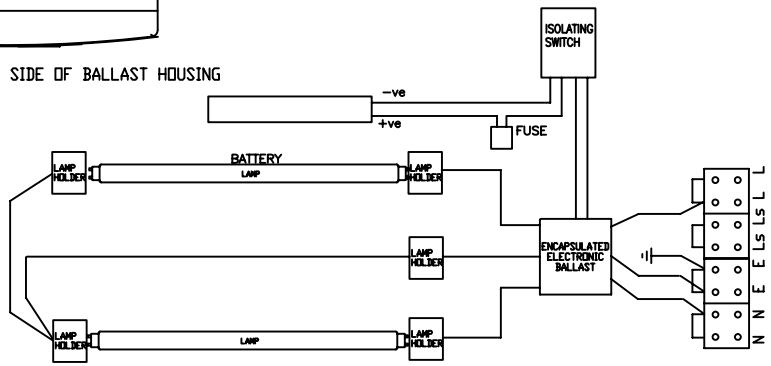

TYPICAL EMERGENCY WIRING DIAGRAM

NOTES:

PRODUCT PROTECTION: EEx em II T4
CERTIFICATE No: BAS00ATEX2191
CODING: Ex II 2GD EEx emd IIC T4 -10C to +55C
TERMINALS : UP TO 6MM SQ.
CABLE ENTRIES : TWO X M20 ENTRIES
INGRESS PROTECTION : IP66/67
CONTROL GEAR HOUSING : POLYCARBONATE WITH SILICONE RUBBER GASKET
LAMP ENVELOPE : POLYCARBONATE END MOULDINGS AND EXTRUDED TUBE.
REFLECTOR : MARINE GRADE STAINLESS STEEL
EXTERNAL FASTNERS : STAINLESS STEEL

WEIGHT:

18W LUMINAIRE : 10.5KG
36W LUMINAIRE : 12.0KG

CATALOGUE REF.	DESCRIPTION	WATTAGE	LAMP	VOLTAGE	FREQUENCY
EXCE/218/BI/EM	EXCALIBUR VL24E	2 x 18W	BI PIN	220 - 277V	50-60Hz
EXCE/236/BI/EM		2 x 36W			
EXCE/218/BI/EM/120		2 x 18W		110 - 130V	
EXCE/236/BI/EM/120		2 x 36W			
EXCE/218/MO/EM		2 x 18W	MONO-PIN	220 - 277V	50-60Hz
EXCE/236/MO/EM		2 x 36W			
EXCE/218/MO/EM/120		2 x 18W		110 - 130V	
EXCE/236/MO/EM/120		2 x 36W			

DCF No	MOD BY	CHANGE	ISSUE	DATE

DRAWN	SLee
CHECKED	SLee
APPROVED	SLee
DATE	30.08.06

REF. DRGS.-

WITHOUT OUR PERMISSION THIS DRAWING, WHICH IS OUR COPYRIGHT, MAY NOT BE REPRODUCED OR MADE AVAILABLE TO THIRD PARTIES.
AUTHORISATION IS GIVEN TO ..... TO REPRODUCE THIS DRAWING FOR INTERNAL PURPOSES ONLY.

MATERIAL	GRP/POLYCARBONATE
TOLERANCE	
FINISH	SELF
SURFACE ROUGHNESS	
DIMS. IN	MM
SCALE	N.T.S

Victor Lighting

Victor Lighting
PO Box 5571,
Glasgow G52 9AH,
Scotland
Tel:0141 810 9644 Fax: 0141 810 9642

TITLE
VL24E EXCALIBUR EMERG
GA DRAWING

DRAWING NUMBER/SHEET NUMBER
F2281