DRAWING NUMBER/SHEET NUMBER
F2504

REMOVE ALL BURRS & SHARP EDGES

IF IN DOUBT ASK!

3RD ANGLE PROJECTION

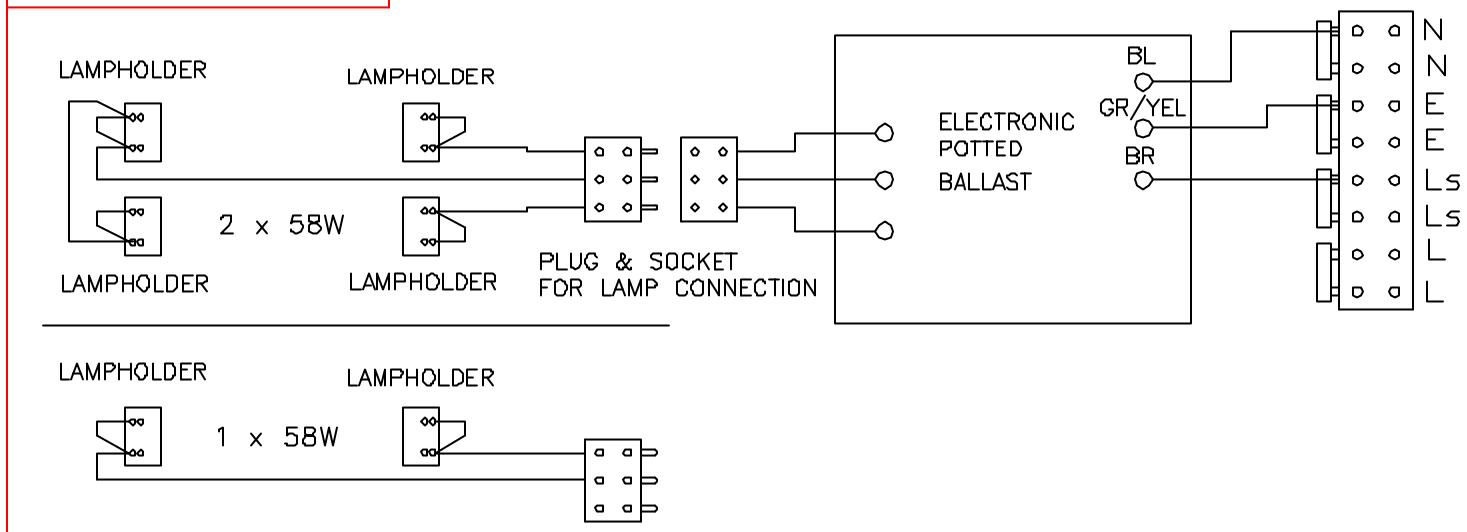

TYPICAL WIRING DIAGRAM

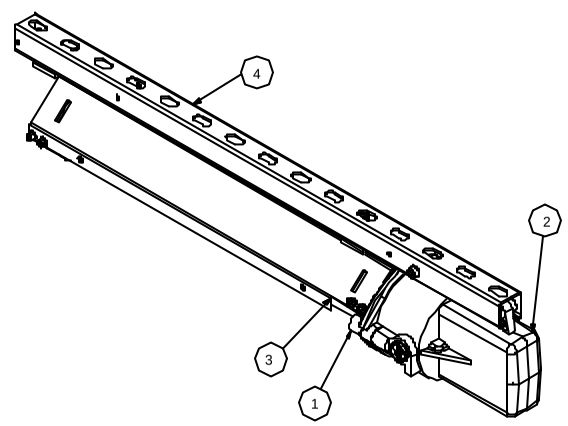

LAMP TYPE	T5		T6	
	AMBIENT TEMPERATURE	DUST	AMBIENT TEMPERATURE	DUST
1 x 58W T8	-20°C TO +55°C	T100°C	-20°C TO +49°C	T85°C
2 x 58W T8				

NOTES
PRODUCT PROTECTION :- EEx d IIB
CERTIFICATE No. SIRA00ATEX1021X
CODING :- Ex II 2 G D EEx d IIB (see table)
TERMINALS :- UP TO 6mm SQ CONDUCTOR
CABLE ENTRIES :- TWO x M20 ENTRIES
BODY MATERIAL :- ALUMINIUM LM6 PAINTED SMOKE GREY
INGRESS PROTECTION :- IP66/67
GLASS & COVER : - TOUGHENED GLASS TUBE WITH ALUMINIUM LM6 GRADE PAINTED SMOKE GREY ENDS
VOLTAGE & FREQUENCY :- 220-254V a.c/d.c 50/60Hz
110-130V a.c/d.c 50/60Hz

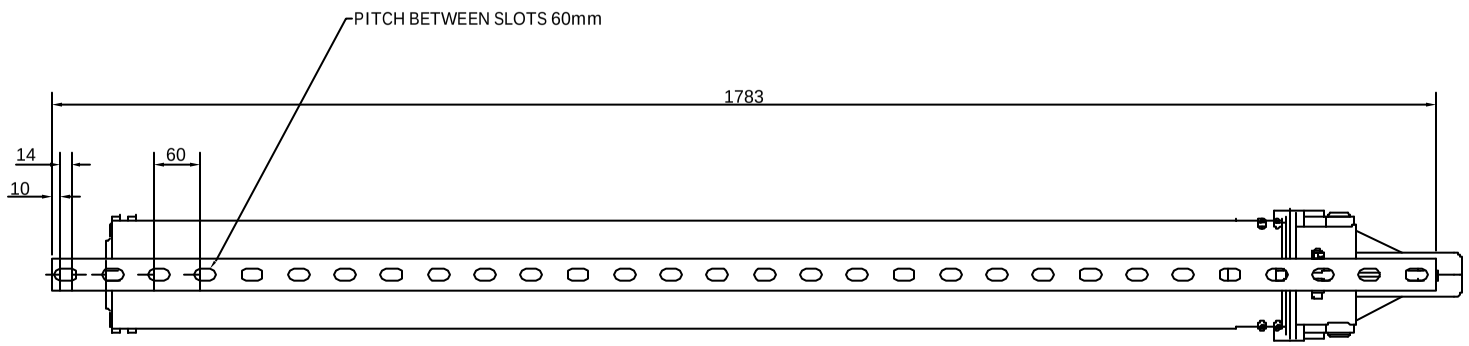

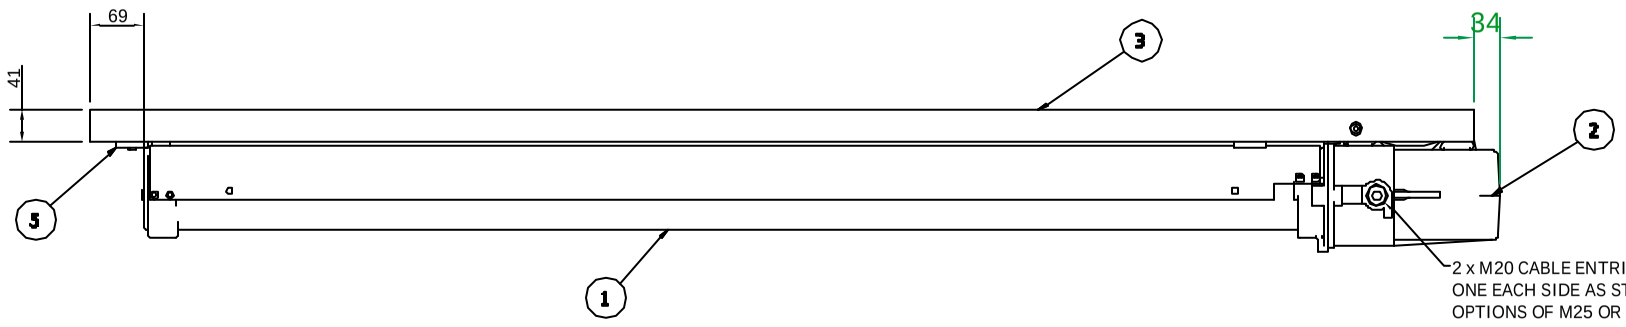



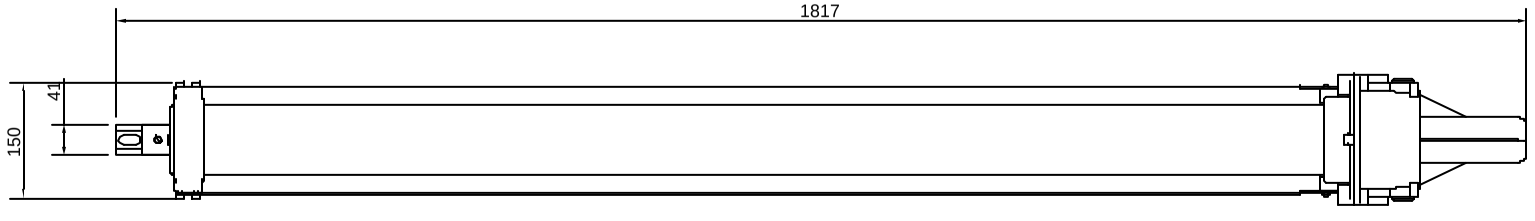

Parts List		
ITEM	QTY	TITLE
1	1	Viscount 58W Glass Tube Assembly
2	1	Viscount Gear Housing
3	1	Viscount External Reflector
4	1	Viscount 58W Mtg Channel

DCF No	MOD BY	CHANGE	ISSUE	DATE

Victor Lighting

Victor Lighting
PO Box 5571,
Glasgow G52 9AH
Scotland
Tel:0141 810 9644 Fax:0141 810 9642

WITHOUT OUR PERMISSION THIS DRAWING, WHICH IS OUR COPYRIGHT, MAY NOT BE REPRODUCED OR MADE AVAILABLE TO THIRD PARTIES.
AUTHORISATION IS GIVEN TO ..... TO REPRODUCE THIS DRAWING FOR INTERNAL PURPOSES ONLY.

DRAWN	JTC
CHECKED	
APPROVED	
DATE	

REF. DRGS.-

MATERIAL: Aluminium LM6
FINISH: Painted Smoke Grey
DIMS. IN: MM
TOLERANCE:
SURFACE ROUGHNESS:
SCALE: -

TITLE: VL51A 58W Viscount General Arrangement

DRAWING NUMBER/SHEET NUMBER: F2504 1 OF 1